


M12 Vent Rear Fastened, with Panel Nut

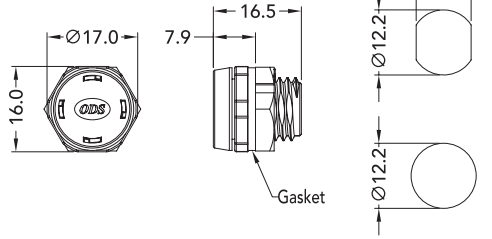


Features and Benefits

- Equalize internal pressure and provide reliable protection from liquids and dust
- Manage moisture and protect devices in harsh environments
- Temperature Range -40°C ~ +105°C
- Max. panel thickness 4.0mm

Part Number	Air Permeability	IP Rating	Standard	Mounting
VTA12SB7001	160ml/min	IPX7	UL94 V0	With Panel Nut
VTA12SB8001	400ml/min	IPX8	UL94 V0	With Panel Nut
VTA12SB8002	79.3ml/min	IPX8	UL94 V0	With Panel Nut

Part Number	Air Permeability	IP Rating	Standard	Mounting
VTB12SB7001	160ml/min	IPX7		With Panel Nut
VTB12SB8001	400ml/min	IPX8		With Panel Nut
VTB12SB8002	79.3ml/min	IPX8		With Panel Nut

M12 Vent Rear Fastened, with Panel Nut

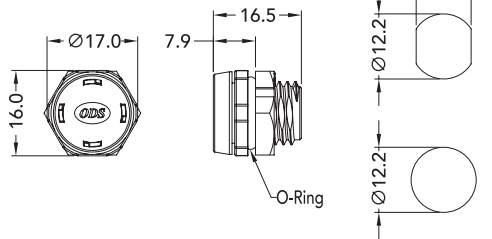


Features and Benefits

- Equalize internal pressure and provide reliable protection from liquids and dust
- Manage moisture and protect devices in harsh environments
- Temperature Range -40°C ~ +90°C
- Max. panel thickness 4.0mm

Part Number	Air Permeability	IP Rating	Standard	Mounting
VTA12SA7001	160ml/min	IPX7	UL94 V0	With Panel Nut
VTA12SA8001	400ml/min	IPX8	UL94 V0	With Panel Nut
VTA12SA8002	79.3ml/min	IPX8	UL94 V0	With Panel Nut

Part Number	Air Permeability	IP Rating	Standard	Mounting
VTB12SA7001	160ml/min	IPX7		With Panel Nut
VTB12SA8001	400ml/min	IPX8		With Panel Nut
VTB12SA8002	79.3ml/min	IPX8		With Panel Nut

M12 Vent Rear Fastened

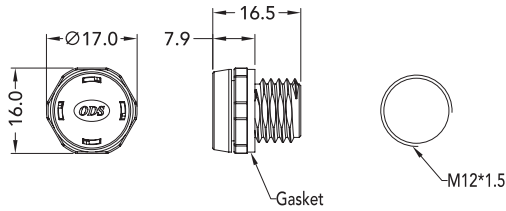


Features and Benefits

- Equalize internal pressure and provide reliable protection from liquids and dust
- Manage moisture and protect devices in harsh environments
- Temperature Range -40°C ~ +105°C
- Max. panel thickness 4.0mm

Part Number	Air Permeability	IP Rating	Standard	Mounting
VTA12WB7001	160ml/min	IPX7	UL94 V0	Without Panel Nut
VTA12WB8001	400ml/min	IPX8	UL94 V0	Without Panel Nut
VTA12WB8002	79.3ml/min	IPX8	UL94 V0	Without Panel Nut

Part Number	Air Permeability	IP Rating	Standard	Mounting
VTB12WB7001	160ml/min	IPX7		Without Panel Nut
VTB12WB8001	400ml/min	IPX8		Without Panel Nut
VTB12WB8002	79.3ml/min	IPX8		Without Panel Nut

M12 Vent Rear Fastened

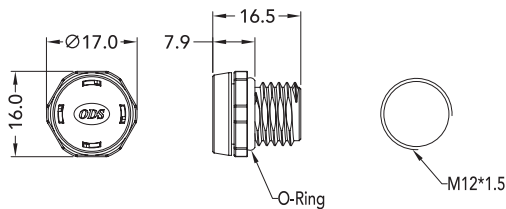

Features and Benefits

- Equalize internal pressure and provide reliable protection from liquids and dust
- Manage moisture and protect devices in harsh environments
- Temperature Range -40°C ~ +90°C
- Max. panel thickness 4.0mm

Part Number	Air Permeability	IP Rating	Standard	Mounting
VTA12WA7001	160ml/min	IPX7	UL94 V0	Without Panel Nut
VTA12WA8001	400ml/min	IPX8	UL94 V0	Without Panel Nut
VTA12WA8002	79.3ml/min	IPX8	UL94 V0	Without Panel Nut

Part Number	Air Permeability	IP Rating	Standard	Mounting
VTB12WA7001	160ml/min	IPX7		Without Panel Nut
VTB12WA8001	400ml/min	IPX8		Without Panel Nut
VTB12WA8002	79.3ml/min	IPX8		Without Panel Nut