

	Cab	le J	loin	er	IPX8
--	-----	------	------	----	------

4Pin

& Cable Joiner



CNPL04BHC-S8001

a la	- 024.0-	

20A

Contact Current Voltage Cable Range

450V

Ф6.5mm~Ф8.5mm

CNPL08DHC-S8001


	Features and Benefits
72.0	 M22 cable joiner with screw-it Temperature Range -25°C ~88 Flame UL94 V0 IPX8 rated for harsh environm

L

7A

130V


8Pin



Cable Range

Ф6.5mm~Ф8.5mm

Assembly Instructions

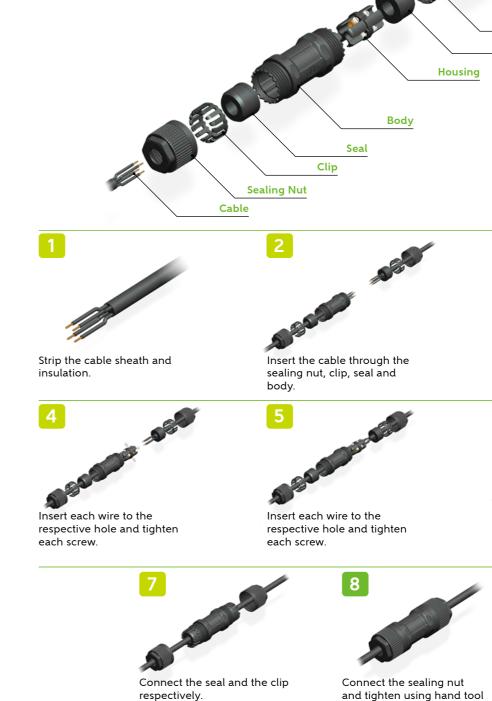







Insert the Housing to Body, pull the housing get to center then rotation the body let housing stop.

and tighten using hand tool (optional) or your hand while holding ass'y.

ODS Electronics

Others